
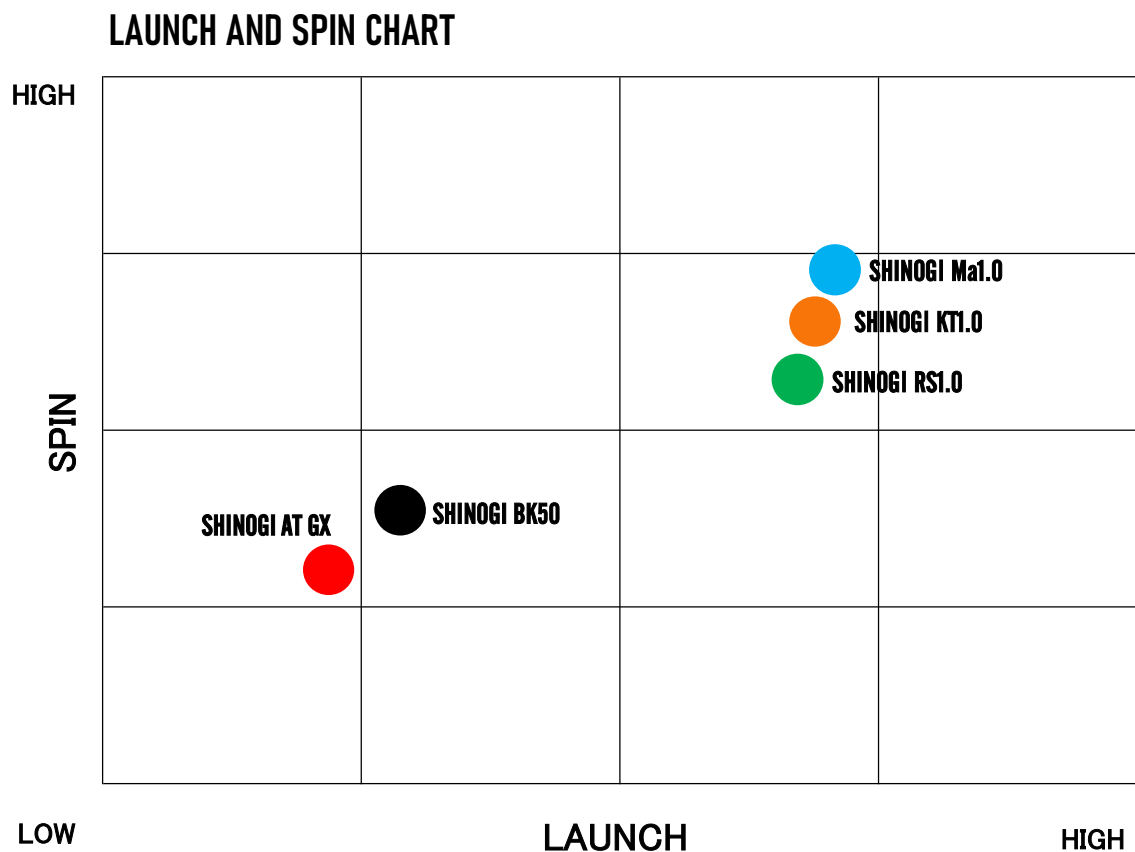


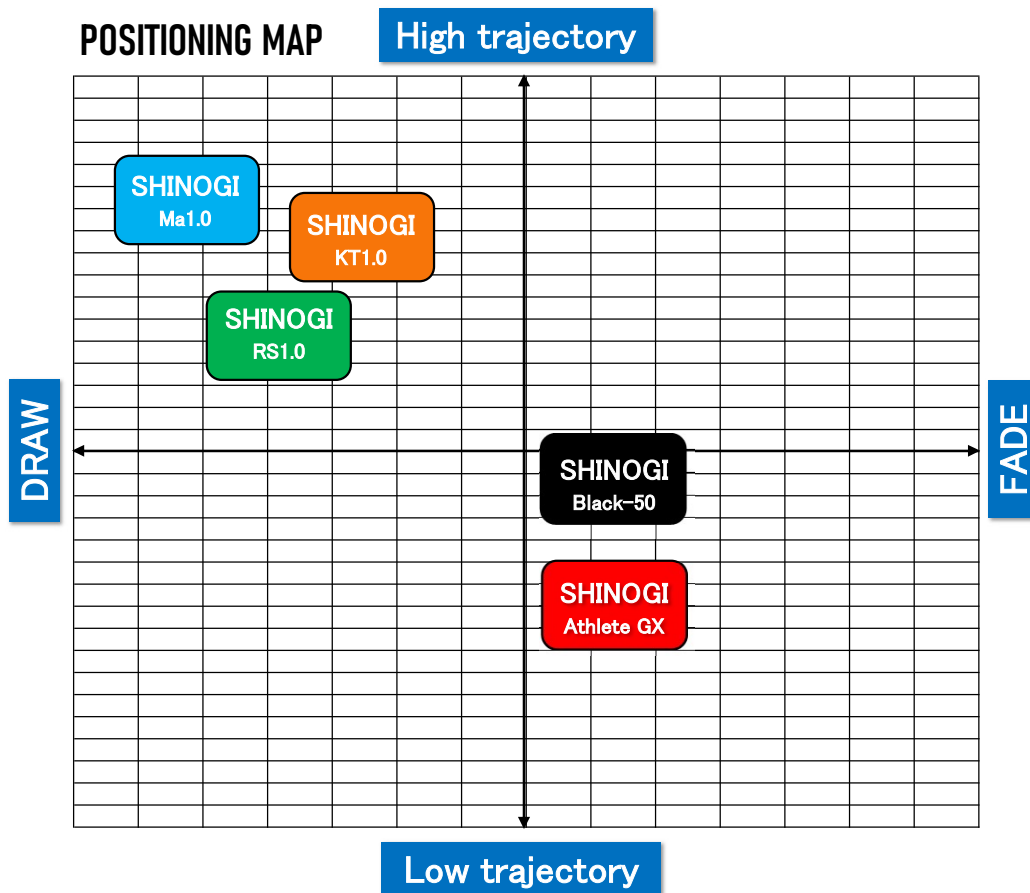

TECHNICAL SPECS

Model	Flex	Length (mm)	Weight (g)	Tip Diameter (mm)	Butt Diameter (mm)	Torque	Bend Point	Tip Length (in)	CPM
SHINOGI Ma1.0	R	1169	50	8.50	15.2	5.3	MID-LOW	2.0	219
SHINOGI Ma1.0	S	1169	52	8.50	15.2	5.3	MID-LOW	2.0	237
SHINOGI Ma1.0	X	1169	54	8.50	15.2	5.3	MID-LOW	2.0	251
SHINOGI KT1.0	R	1169	54	8.50	15.2	4.0	MID-LOW	2.0	227
SHINOGI KT1.0	SR	1169	55	8.50	15.3	4.0	MID-LOW	2.0	237
SHINOGI KT1.0	S	1169	56	8.50	15.3	4.0	MID-LOW	2.0	247
SHINOGI KT1.0	SX	1169	58	8.50	15.4	4.0	MID-LOW	2.0	257
SHINOGI KT1.0	X	1169	60	8.50	15.4	4.0	MID-LOW	2.0	265
SHINOGI RS1.0	T-401	1169	46	8.50	15.1	5.5	MID	2.0	203
SHINOGI RS1.0	T-501	1169	53	8.50	15.3	4.6	MID	2.0	212
SHINOGI AT GX	SR	1169	64	8.50	15.4	3.5	MID	2.0	243
SHINOGI AT GX	S	1169	66	8.50	15.4	3.5	MID	2.0	251
SHINOGI AT GX	SX	1169	67	8.50	15.4	3.5	MID	2.0	261
SHINOGI AT GX	X	1169	69	8.50	15.4	3.5	MID	2.0	273
SHINOGI BK50	S	1169	55	8.50	15.2	5.1	MID	2.0	239
SHINOGI BK50	S+	1169	57	8.50	15.2	5.1	MID	2.0	249
SHINOGI BK50	SX	1169	58	8.50	15.2	5.0	MID	2.0	259
SHINOGI BK50	X	1169	60	8.50	15.3	5.0	MID	2.0	267
Shinogi KT FW	R	1118	61	8.50	15.4	3.8	MID	3.0	237
Shinogi KT FW	SR	1118	63	8.50	15.5	3.7	MID	3.0	247
Shinogi KT FW	S	1118	64	8.50	15.5	3.7	MID	3.0	257
Shinogi KT FW	SX	1118	65	8.50	15.6	3.7	MID	3.0	267
Shinogi KT FW	X	1118	66	8.50	15.6	3.7	MID	3.0	275
Shinogi i65 LG	–	990	66	9.35	14.9	3.2	MID	2.0	–
Shinogi i65 MD	–	955	66	9.35	14.9	3.2	MID	2.0	286
Shinogi i65 ST	–	915	66	9.35	14.8	3.2	MID	2.0	–
Shinogi i75 LG	–	990	72	9.35	15.2	2.9	MID	2.0	
Shinogi i75 MD	–	955	72	9.35	15.2	2.9	MID	2.0	288
Shinogi i75 ST	–	915	72	9.35	15.2	2.9	MID	2.0	

*No tip cut in standard assembly, and up to 0.5 inch when tip cutting with shaft arrangement.

Be especially careful with SHINOGI BK50, which use boron at the tip, as the shaft balance is likely to be lost.

*CPM is approximate when assembled with lengths of 45.5" (for DRIVER) and 43.0" (for FW) and 37.25"(for IRON #7).

Tip Trimming Information

Model	Tip Trimming(in)		
	3Wood	5Wood	7Wood
SHINOGI KTFW	0	0.5	1.0
SHINOGI AT FW	0	0.5	1.0
SHINOGI FW60	0	0.5	1.0

SHINOGI i65/i75

Iron	Tip Trimming(in)	Product Number
#3	0	FIRAF-LGB
#4	0.5	FIRAF-LGB
#5	1.0	FIRAF-LGB
#6	0	FIRAF-MDB
#7	0.5	FIRAF-MDB
#8	1.0	FIRAF-MDB
#9	0	FIRAF-STB
PW	0.5	FIRAF-STB
AW	0.75	FIRAF-STB
SW	0.75	FIRAF-STB